

Adonis series

ADONIS

LED FLOODLIGHT



STANDARD COLOUR



DETAILS


- Extruded aluminium body
- Lateral caps in ABS
- Screen: tempered glass (4 mm)
- Standard colour: grey
- Black colour on request
- Adjustable steel AISI304 brackets
- CCT Standard: 4000K
CCT Optional: 3000K, 5000K
- Power factor: > 0.97
- CRI (Ra): 80...89
- Lifetime: 70.000 hrs
- Luminous source efficiency:
100 lm/W
- LED driver integrated

APPLICATIONS

- Outdoor sport facilities
- Indoor sport ground
- Parking areas
- Tunnels
- Civic parks
- Gardens
- Town centres




ADONIS

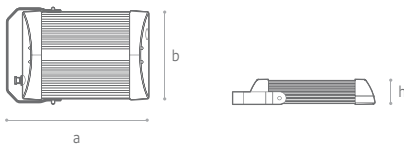


Code	(W)	(lm)	LED n°	(mA)	a (mm)	b (mm)	h (mm)	W.Exp. (m²)	(kg)
LUX-ADO-L24L-[*]-4K	25	2.950	24	350	404	416	112	0,20	8
LUX-ADO-L24M-[*]-4K	39	4.150	24	530	404	416	112	0,20	8
LUX-ADO-L24H-[*]-4K	52	6.000	24	700	404	416	112	0,20	8
LUX-ADO-L32H-[*]-4K	69	8.000	32	700	404	416	112	0,20	8
LUX-ADO-L48M-[*]-4K	82	8.300	48	530	404	416	112	0,20	8
LUX-ADO-L48H-[*]-4K	104	12.000	48	700	404	416	112	0,20	8
LUX-ADO-L64H-[*]-4K	139	16.000	64	700	404	416	112	0,20	8
LUX-ADO-L96M-[*]-4K	165	16.550	96	530	554	416	112	0,26	12
LUX-ADO-L80H-[*]-4K	174	20.000	80	700	554	416	112	0,26	12
LUX-ADO-L96H-[*]-4K	208	24.000	96	700	554	416	112	0,26	12
LUX-ADO-L104H-[*]-4K	225	26.000	104	700	554	416	112	0,26	12
LUX-ADO-L120H-[*]-4K	260	30.000	120	700	754	416	112	0,303	17
LUX-ADO-L144H-[*]-4K	313	36.000	144	700	754	416	112	0,303	17

[* To complete the code, please choose the optic from below].


115° – SYMMETRIC [00]

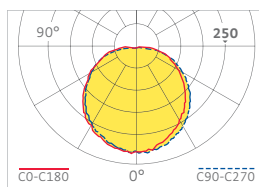


16° – SYMMETRIC [16]

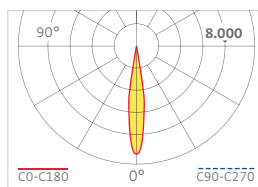


31° – SYMMETRIC [31]

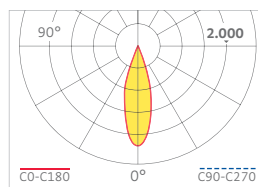


46° – SYMMETRIC [46]

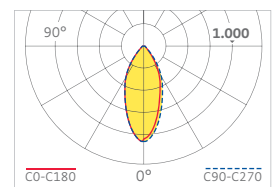


56° – SYMMETRIC [56]

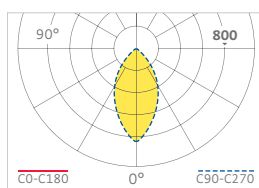


68° – SYMMETRIC [68]

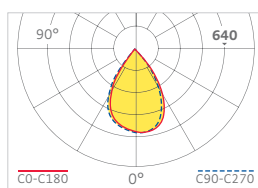

80° – SYMMETRIC [80]



ROTO-SYMMETRIC [R1]

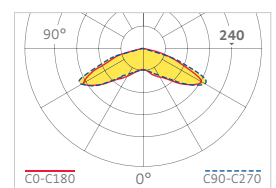

Adonis series

MOUNTING OPTIONS

- Wall mounting (standard)
- Raceways mounting (tunnels)
- Suspension mounting
- Pole mounting
- Extended cable mounting
- Recessed mounting

LUX-ADO-AM-W

Wall mounting (standard)



LUX-ADO-AM-R

Raceways mounting (tunnels)



LUX-ADO-AM-S

Suspension mounting



LUX-ADO-AM-P

Pole mounting



LUX-ADO-AM-ST

Extended cable mounting



LUX-ADO-AM-F

Recessed mounting



MOUNTING ACCESSORIES

ADONIS ARCHITECTURAL:

- Single arm mounting
- Double arm mounting
- Street furniture mounting

LUX-ADO-AM-SA

Single arm mounting



LUX-ADO-AM-DA

Double arm mounting



LUX-ADO-AM-F2

Street furniture mounting



REMOTE CONTROL

- Optional

Contained in the fixture, available in versions:


- Wireless technology
- Powerline communication technology
- Self-adjusting flow (pre-programming)

Features:


- Remote control and adjustment of the total luminous flow
- Instant calculation of the consumed energy
- Measurement of the working temperature at the welding point of the LEDs and the related alarms
- Evaluation of the functioning state and related alarms
- Measurement of working hours




ASYMMETRIC [A0]

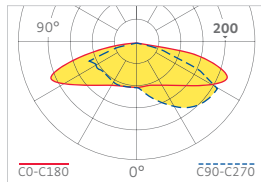


ASYMMETRIC [A1]

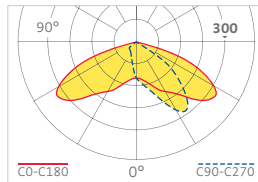


ASYMMETRIC [AR]



ASYMMETRIC [A3]



19°x95° – ELLIPTIC [E1]



16°x36° – ELLIPTIC [E2]

