

Halley series

HALLEY

LED HIGH-BAY FITTING



STANDARD COLOUR



DETAILS


- Technopolymer body
- Anodized aluminium reflector
- Stainless steel suspension hook
- Optional tempered glass
- Switch on-off time: < 1 sec
- CCT Standard: 4000K
CCT Optional: 3000K, 5000K
- Power factor: > 0.95
- CRI (Ra): 80...89
- Luminous source efficiency:
100 lm/W
- Lifetime: 80.000 hrs
- LED driver integrated
- Available in IP68 version on request
- Active Cooling System mounted on versions:
135W, 188W, 250W

APPLICATIONS

- Industrial areas
- Warehouses
- Commercial areas
- Outdoor sport facilities
- Indoor sport grounds




HALLEY

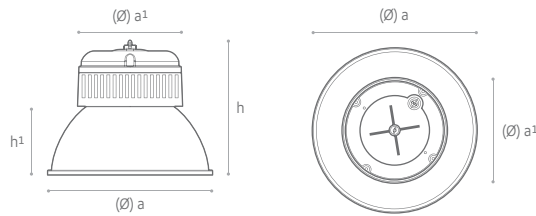


Code	(W)	CCT (K)	(lm)	LED n°	(mA)	CRI (Ra)	a (mm)	a1 (mm)	h (mm)	h1 (mm)	(kg)
LUX-HAL-L10H-90-4K	87	4000	10.000	10	700	80...89	Ø 508	Ø 323	422	215	8
LUX-HAL-L16H-90-4K	135	4000	16.000	16	700	80...89	Ø 508	Ø 323	422	215	8
LUX-HAL-L22H-90-4K	188	4000	22.000	22	700	80...89	Ø 508	Ø 323	422	215	8
LUX-HAL-L24X-90-4K	250	4000	30.000	24	800	80...89	Ø 508	Ø 323	422	215	8

These codes refer to 4000K. Also available in 3000K and 5000K version.


90° – ROTO-SYMMETRIC [90]

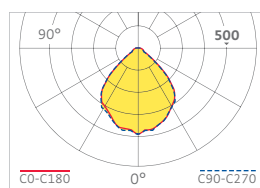

87W – 90°

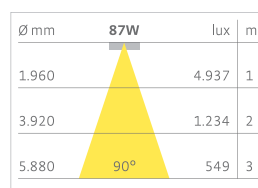

135W – 90°

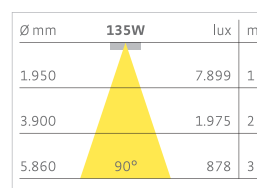

188W – 90°

