

## SAMPRONIO LED

## EMERGENCY EQUIPT




## DETAILS

- Ideal for corridors of exhaust and homes.
- Available with accessories wall mount allows tilting to optimize the illuminated area.
- Optimal Load Charge: 24 Hrs to 36Hrs
- Short circuit protection
- Red LED charge status display
- Battery: 4V Electrolyte Absorbed
- Can operate as maintained or non maintained mode
- 2 Modes of Operation: Hi-7.0h Low-30.0h
- Quick connection
- Ta (°C): -20...60

## APPLICATIONS

- Offices
- Private areas
- Schools
- Stairs
- Airports

SAMPRONIO 4060

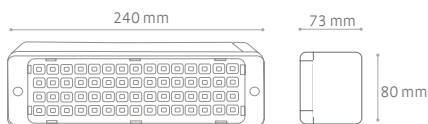

SAMPRONIO 4040



Code	Max (Hrs)	(lm)	Leds	Supply	Body	Battery	a(mm)	h(mm)	(kg)
LUX-SAM-GX4040	30	250	40	220 50/60hZ	Polycarbonate	EA 4v 4Ah	240	80	0.930
LUX-SAM-GX4060	20	300	60	220 50/60hZ	Polycarbonate	EA 4v 4Ah	240	80	0.930

