


Welkin series

WELKIN

ULTRA SLIM LED PANEL



STANDARD COLOUR



DETAILS

- Ultra slim design
- Extruded aluminium body
- Powder coating
- Standard colour: white
- PMMA + PC diffuser
- Beam options: 120°
- CCT: 3000K, 4000K, 5000K
- Power factor: > 0.90
- CRI (Ra): 80...89
- Lifetime: 40.000 hrs
- Ta (°C): -20...50
- Luminous efficiency: 80lm/W
- UGR: > 19
- Supplied with LED driver
- Dimmable driver on request
- DALI driver on request

APPLICATIONS

- Offices
- Meeting rooms
- Show rooms
- Retail stores
- Hotels
- Common areas

ACCESSORIES

Mounting Kit:

- Wall: [LUX-WEL-WM]





- Suspension: [LUX-WEL-SK]




WELKIN 295 × 295, 595 × 595

WELKIN 295 × 1.195

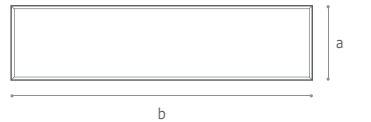


Code	(W)	CCT (K)	(lm)	LED n°	(mA)	CRI (Ra)	a (mm)	b (mm)	h (mm)	Colour
LUX-WEL-33-L20W-3K-W	20	3000	1.550	64	350	80...89	295	295	9,6	White
LUX-WEL-33-L20W-4K-W	20	4000	1.550	64	350	80...89	295	295	9,6	White
LUX-WEL-33-L20W-5K-W	20	5000	1.550	64	350	80...89	295	295	9,6	White
LUX-WEL-66-L38W-3K-W	38	3000	3.000	128	700	80...89	595	595	9,6	White
LUX-WEL-66-L38W-4K-W	38	4000	3.000	128	700	80...89	595	595	9,6	White
LUX-WEL-66-L38W-5K-W	38	5000	3.000	128	700	80...89	595	595	9,6	White
LUX-WEL-312-L38W-3K-W	38	3000	3.000	128	700	80...89	295	1.195	9,6	White
LUX-WEL-312-L38W-4K-W	38	4000	3.000	128	700	80...89	295	1.195	9,6	White
LUX-WEL-312-L38W-5K-W	38	5000	3.000	128	700	80...89	295	1.195	9,6	White
LUX-WEL-66-L48W-3K-W	48	3000	3.700	128	900	80...89	595	595	9,6	White
LUX-WEL-66-L48W-4K-W	48	4000	3.700	128	900	80...89	595	595	9,6	White
LUX-WEL-66-L48W-5K-W	48	5000	3.700	128	900	80...89	595	595	9,6	White
LUX-WEL-312-L48W-3K-W	48	3000	3.700	128	900	80...89	295	1.195	9,6	White
LUX-WEL-312-L48W-4K-W	48	4000	3.700	128	900	80...89	295	1.195	9,6	White
LUX-WEL-312-L48W-5K-W	48	5000	3.700	128	900	80...89	295	1.195	9,6	White
LUX-WEL-66-L70W-3K-W	70	3000	5.000	256	1.400	80...89	595	595	9,6	White
LUX-WEL-66-L70W-4K-W	70	4000	5.000	256	1.400	80...89	595	595	9,6	White
LUX-WEL-66-L70W-5K-W	70	5000	5.000	256	1.400	80...89	595	595	9,6	White
LUX-WEL-312-L70W-3K-W	70	3000	5.100	256	1.400	80...89	295	1.195	9,6	White
LUX-WEL-312-L70W-4K-W	70	4000	5.100	256	1.400	80...89	295	1.195	9,6	White
LUX-WEL-312-L70W-5K-W	70	5000	5.100	256	1.400	80...89	295	1.195	9,6	White

38W – 120°

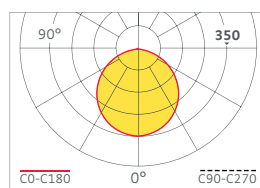

48W – 120°

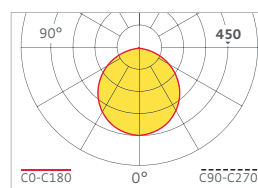

70W – 120°

